


■ Application of Oscillator

- ▶ PLL circuit
- ▶ Broad casting equipment
- ▶ AFC circuit
- ▶ Sonet/SDH.ATM
- ▶ FM modulator

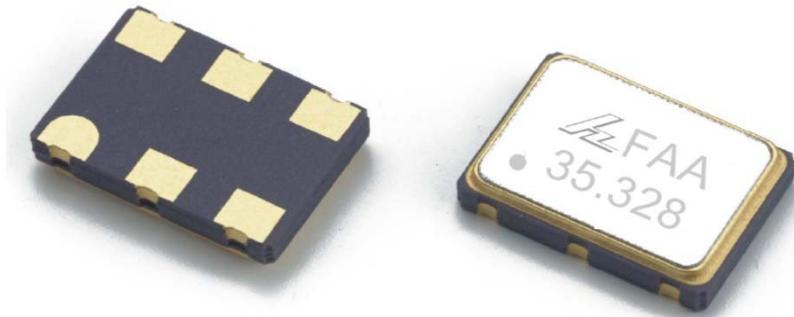

■ Features


- ▶ High Frequency
- ▶ LVDS Square Wave
- ▶ Ultra-Low Jitter
- ▶ Extended Operating Temperature
- ▶ SMD Version 6 Pad
- ▶ RoHS compliant / Pb free



Electrical Specification

PARAMETERS	CONDITIONS	CHARACTERISTICS	UNITS
Output Logic	-	LVDS Square Wave	-
Input Voltage (VDD)	-	3.3 ±5%	VDC
Frequency Range (fO)	-	106.250~212.500	MHz
Operating Temperature (TOPR)	-	0 ~ +85	°C
Storage Temperature (TSTG)	-	-55 ~ +125	°C
Overall Frequency Stability	(a) - (e)	±50 max.	PPM
	(a) Frequency Tolerance	Inclusive of Overall Stability	-
	(b) Temperature Stability	Inclusive of Overall Stability (Operating Temperature)	-
	(c) Input Voltage Stability	Inclusive of Overall Stability (VDD ± 5%)	-
	(d) Load Stability	Inclusive of Overall Stability (RL ± 10%)	-
	(e) Aging (@ 25°C)	±3 max.	PPM/Y
Current Consumption	-	60 max.	mA
Rise Time (Tr)	-	600 max. (20% to 80% of Waveform)	ps
Fall Time (Tf)	-	600 max. (20% to 80% of Waveform)	ps
Offset Voltage	-	1.2 ±0.1	V
Output Voltage (P-P)	-	400 ~ 800	mV
Load	-	100	Ohms
Duty Cycle	-	50 ±5	%
Start-Up Time (TS)	-	10 max.	μs
Phase Jitter	(12KHz to 20MHz)	RMS: 1 max.	ps

Dimensions (mm):

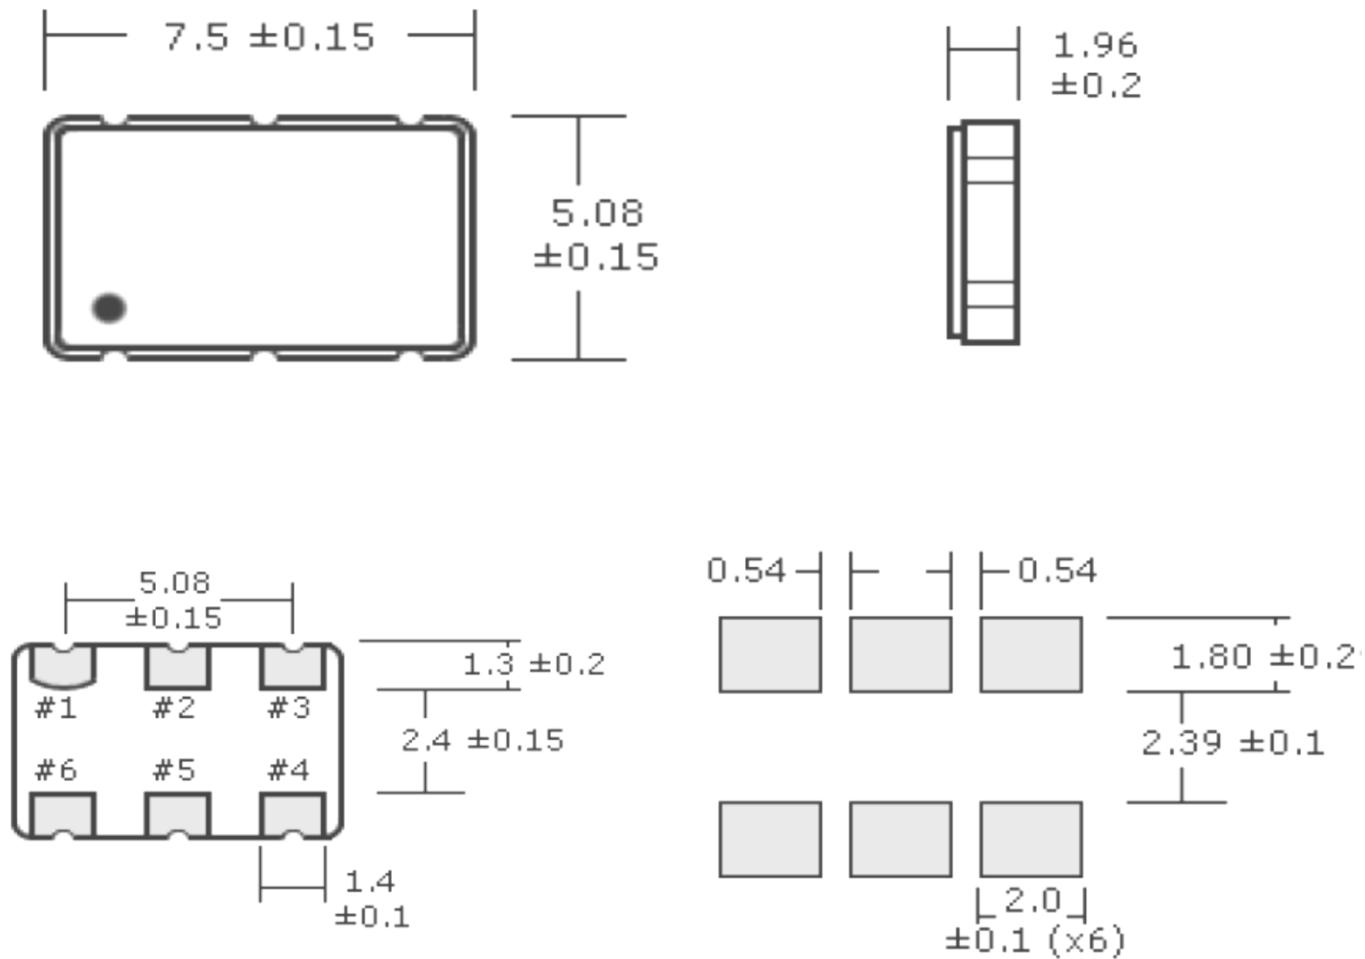

PIN CONNECTIONS

#1	Tristate Enable High or No Connection (TS1)
#2	Tristate Enable High or No Connection (TS)
#3	Ground
#4	Output
#5	Complimentary Output
#6	Vdd